

## Other Product

### FLANGE ANGLE

#### • Special Design for Plaster Ceiling installation

- 0.30MM (T) X 30MM (W) X 9MM (H) X 12FT (L)
- 0.30MM (T) X 32MM (W) X 11MM (H) X 12FT (L)
- 0.35MM (T) X 32MM (W) X 11MM (H) X 12FT (L)
- 0.35MM (T) X 34MM (W) X 13MM (H) X 12FT (L)

*\*The thickness of products are subject to tolerance*



### METAL STUD

#### • Popular choice for Partition installation

- 0.30MM (T) X 41MM (W) X 23MM (H) X 8FT / 9FT / 10FT (L)
- 0.35MM (T) X 41MM (W) X 23MM (H) X 8FT / 9FT / 10FT (L)
- 0.35MM (T) X 47MM (W) X 25MM (H) X 8FT / 9FT / 10FT (L)
- 0.35MM (T) X 50MM (W) X 25MM (H) X 8FT / 9FT / 10FT (L)
- 0.35MM (T) X 75MM (W) X 24MM (H) X 8FT / 9FT / 10FT (L)

*\*The thickness of products are subject to tolerance*



### METAL ACCESSORIES

#### • Suitable for Speed Panel Installation

##### • CORNER BEAD

0.40MM (T) X 30MM (W) X 30MM (H) X 10FT (L)

##### • SHADOWLINE STOPPING ANGLE

0.35MM (T) X 30MM (W) X 10MM X 10MM X 10FT (L)

*\*The thickness of products are subject to tolerance*



**HAI KANG STEEL (M) SDN. BHD.**



#### Manufacturer:

**HAI KANG STEEL (M) SDN. BHD.** 200701003667 (761665-W)

HQ-PG : No. 434, Jalan IKS Tasek, 14120 Simpang Ampat, Pulau Pinang.

Tel : 04-588 4888 (Hunting Line) / 588 0999 / 588 6208

Fax : 04-588 2555 (Sales Dept), 04-588 3550 (A/c Dept)

Email : salesdwf@hksteel.com.my (Door & Window Frame)

salesfa@hksteel.com.my (Ceiling Suspension System)

salesfa@hksteel.com.my (Other Products)

KB Branch : PT 5152, Kawasan Perindustrian Pengkalan Chepa II,

Mukim Panchor Kemumim, 16100 Kota Bharu, Kelantan.

Tel : 09-774 9195 / 09-774 9196 Fax: 09-773 7577

Email: salesdwf\_kb@hksteel.com.my

Website: [www.hksteel.com.my](http://www.hksteel.com.my)

[www.hksteel.com.my](http://www.hksteel.com.my)







# Metal Door Frame & Window Frame

## HAI KANG STEEL (M) SDN. BHD.

Our Company manufactures a comprehensive range of high quality metal door & window frames. Materials used are certified Electro-Galvanised Steel Strips conforming to all metal frames.

State-of-the-art Roll-Forming machinery and up-to-date technology are employed in the manufacturing process; combined with professional workmanship, comprehensive technical and stringent quality control, every metal frame built is truly a craftsmanship of superior quality.

### SPECIFICATIONS

#### Material

Electro Galvanized Steel, GA, Aluzinc



#### Profile

Head & jamb exclusive 6/8-fold (100WA, 120WA, 130WA, 140WA, 150WA, 166WA) /

#### Corners


Tagged, mitred, welded & treated / Patented Knocked-Down(KD-118) System

#### SINGLE REBATE

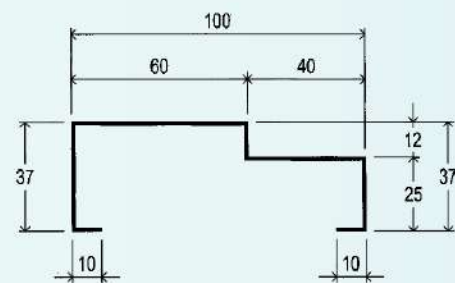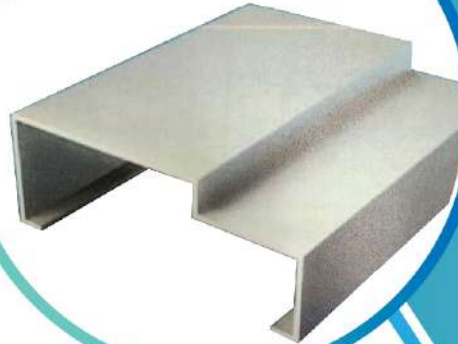


Thickness : 0.8mm / 1.0mm

100 x 37

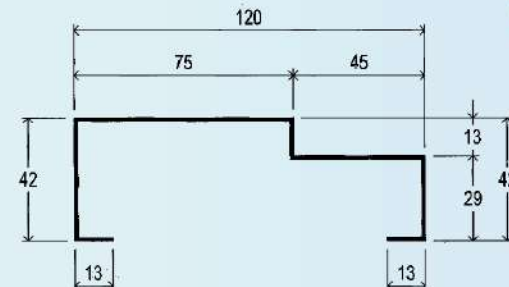


Thickness : 0.8mm - 1.3mm

120 x 42

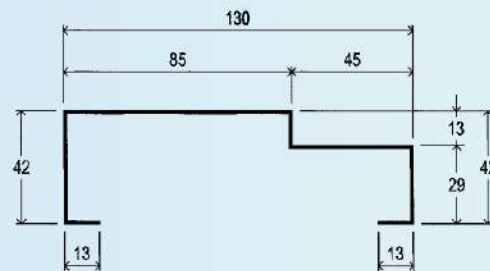


Thickness : 0.8mm - 1.3mm

130 x 42

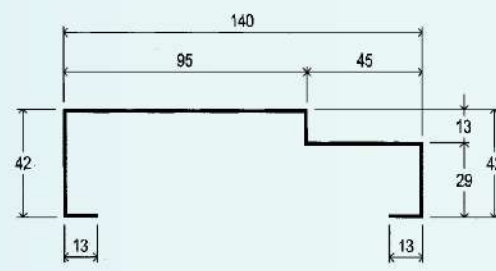


Thickness : 0.8mm - 1.3mm

140 x 42

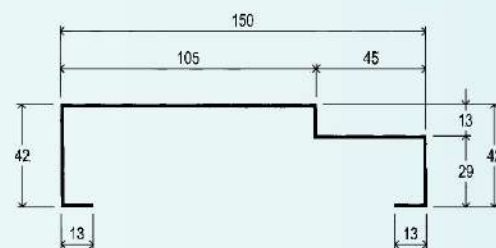

Thickness : 0.8mm - 1.3mm

150 x 42

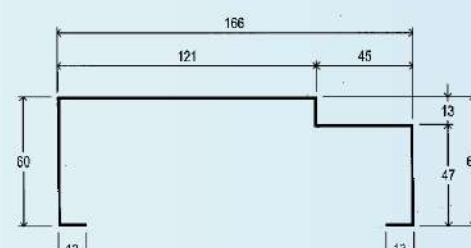

Thickness : 0.8mm - 1.3mm

166 x 60

\* The weight and height tolerance within (±) 2mm



# Metal Door Frame & Window Frame

## HAI KANG STEEL (M) SDN. BHD.

Our Company manufactures a comprehensive range of high quality metal door & window frames. Materials used are certified Electro-Galvanised Steel Strips conforming to all metal frames.

State-of-the-art Roll-Forming machinery and up-to-date technology are employed in the manufacturing process; combined with professional workmanship, comprehensive technical and stringent quality control, every metal frame built is truly a craftsmanship of superior quality.

### SPECIFICATIONS

#### Material

Electro Galvanized Steel, GA, Aluzinc


#### Profile

Head & jamb exclusive 14-fold (130WA, 140WA, 150WA, 156WA) /

#### Corners


Tagged, mitred, welded & treated / Patented Knocked-Down(KD-118) System

#### DOUBLE REBATE

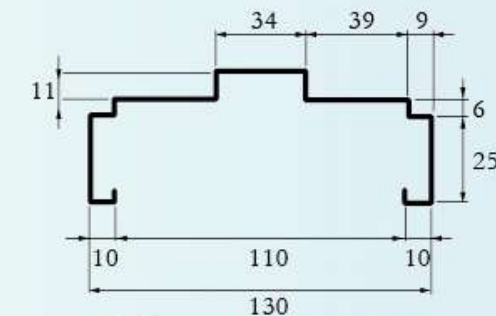


Thickness : 0.8mm / 1.0mm

130 x 42

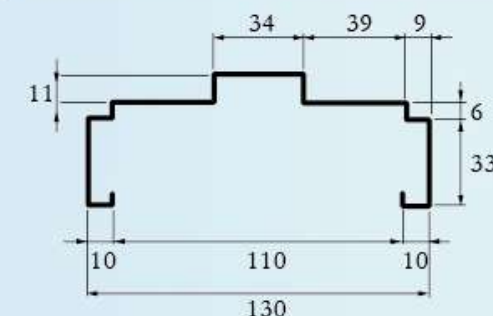


Thickness : 0.8mm / 1.0mm

130 x 50

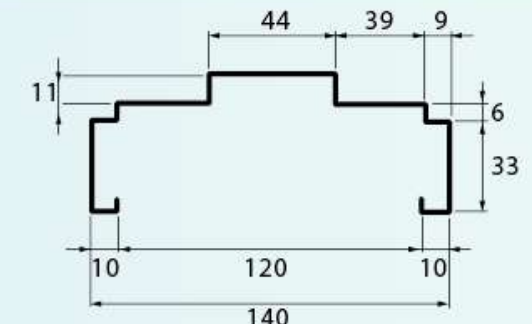


Thickness : 0.8mm / 1.0mm

140 x 50

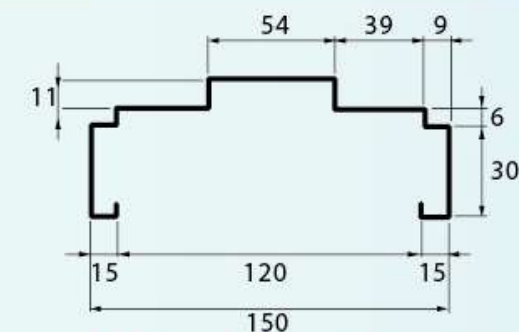

Thickness : 0.8mm / 1.0mm

150 x 47

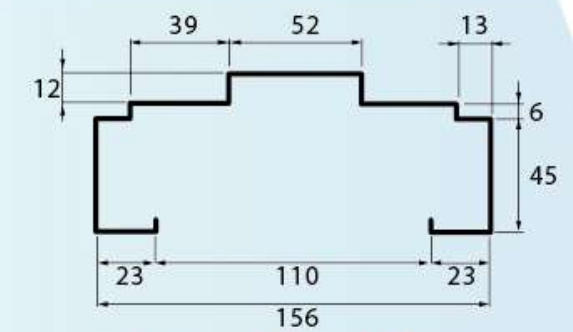

Thickness : 0.8mm / 1.0mm

156 x 63

\* The weight and height tolerance within (±) 2mm





W155mm x H70mm x L 2178mm

#### Step 1

Fix up the jambs with "L" brackets  
Screw the "L" brackets on to the jambs



#### Step 2

Fix up the head with "L" brackets  
Screw the "L" brackets on to the head  
to form the door frame



#### Step 3

Fix up the spreader bars with  
the door frame



### (A) HAI KANG STEEL KD-118 Metal Door Frame Knocked-Down System.

HAI KANG STEEL KD-118 Knock-Down System Metal Door Frame is a patented innovation with advantages not found in the conventional built-up system to fulfill the specific needs of both the retailers and builders. The benefits of HAI KANG STEEL KD-118 Knock-Down System are:

- Door Frame members (Head & Jambs) and accessories (hinges, brick ties, screws, striker plate & lock pocket, shock absorbing buffers and spreader bars) are properly packed for economical and convenient transportation to the store or construction site .
- Remarkable savings in storage and work space.
- Neat and light weight packing of 9.5 kg per set.
- Welding is not necessary done to the frame and hence no damage is caused to the protective coating on the frame.
- Simple & fast assembly process that does not require special tools or skills.

### (B) HAI KANG STEEL BU-118 Metal Door Frame Built-Up System.

BU-118 Built-Up System Metal Door Frame is an alternative system available for the choice of builders or any other users to suit their constructional needs. Albeit being without the advantageous features of the Knocked-Down System, BU-118 Built-Up System has the following functional benefits:

- Door frame members and accessories are fully & rigidly assembled by welding & fastening to become a complete structure.
- No assembling work is necessary at site
- Remarkable savings in labour cost and time



### KD-118 SYSTEM

Screws

"L" Bracket

Jambs

Striker plate

PVC Stopper

Head

Adaptor Bar

Brick Ties

Unobstrusive hinges

Spreader Bars


### ACCESSORIES

- Hinges : Plated, 100mm loose pin slotted and welded in vertical, 3pcs per frame
- Shock Absorbing Buffers : 2 pcs per closing jamb
- Adjustable Striker Plate
- Brick Ties : 3 pcs per frame
- Adaptor Bar : 3 pcs per frame
- Fixed Glass Louver Holders (optional)
- Mild Steel Security Bars (optional)

### HAI KANG STEEL METAL WINDOW FRAME

We also manufacture a wide range of outstanding quality Metal Window Frames from the same proven performer - JIS G 3313 Certified Electro Galvanised Steel Strips. The following comprehensive list of Metal Window Frames with a wide array of configurations for different applications further exemplifies the hallmark of quality & versatility :


- Adjustable Louver Window Frame (Single or multiple bays)
- Fixed Louver Window Frame (single or multiple bays)
- Adjustable & Fixed Louver Combination Window Frame (Single or multiple bays)
- Casement Window Frame
- Top Hung Window Frame
- Casement & Top Hung Combination Window Frame
- Door & Window Combination Frame

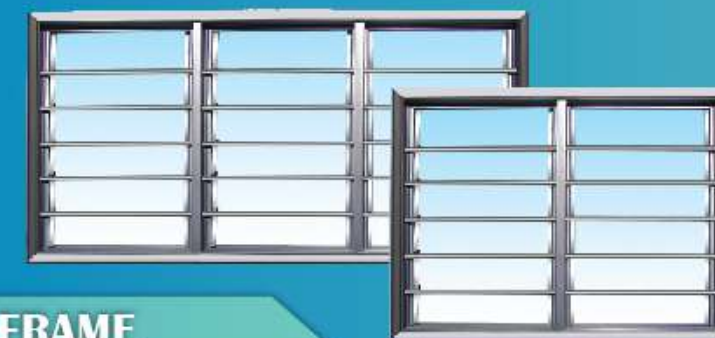



**HAI KANG STEEL** Metal Door Frames give user the flexibility of either integrating them with feature facia bricks or plastering. All **HAI KANG STEEL** Metal Door Frames are made to the exact requirements of the doors for which they are intended. With the wire brick ties (to brickworks) or R.C. column adaptors / adaptor straps, the **HAI KANG STEEL** Metal Door Frames require no nails or lintels but just 6 easy steps of installation shown below:

## STEP 1

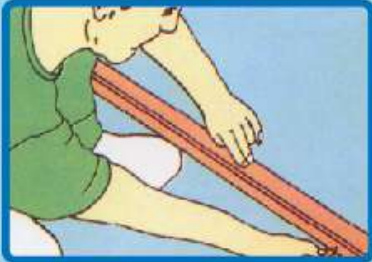

Identify brickwork location and door position.

## STEP 2




To prop up metal door frame, use two planks with nails at the ends. Ensure the correct direction of your door hinge then erect the door frame. The nails on the plank should hook to the edge of the frame.

## STEP 3




To check whether the frame is properly plumbed, use a spirit level.

## STEP 4

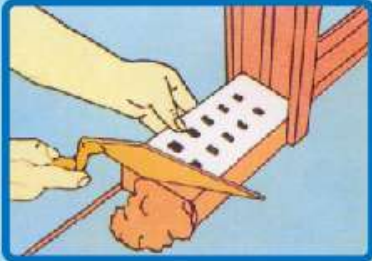


Begin brickwork by laying the brick into the rebate behind the back of the metal door frame.

## STEP 5

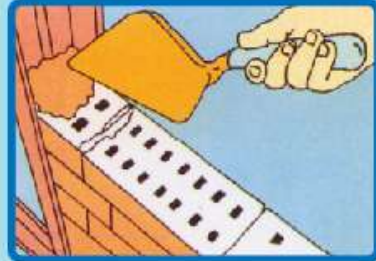


Brickwork is done by placing mortar into each gap between the brick and frame for each layer. This is to ensure that the frame is properly filled to give rigidity and strength by becoming an integral part of the structure.

## STEP 6

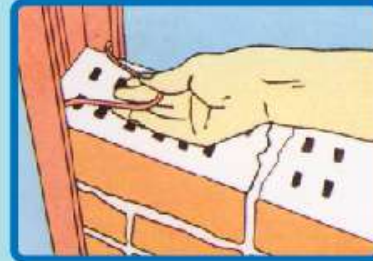

Special wire brick ties come with each metal door frame. These ties are for binding the bricks. When mortar is set, remove the spreader bars at base of the metal door frame.

## TYPICAL CROSS SECTION OF DOOR FRAME INSTALLATION

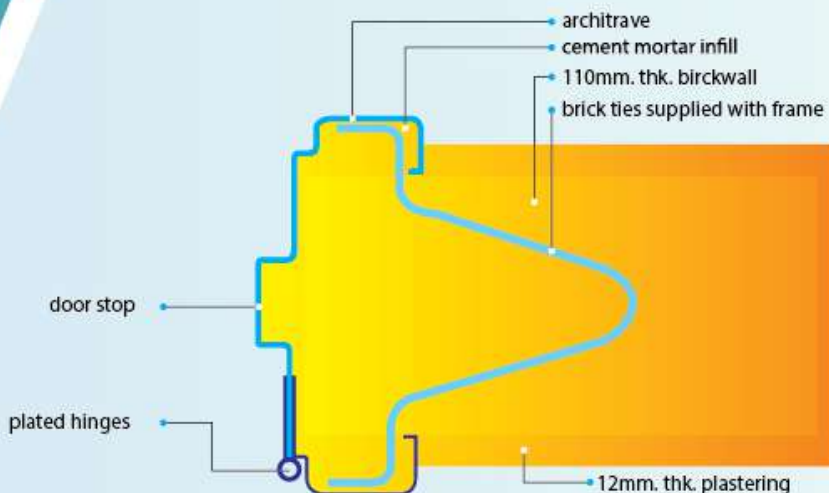

## ORDERING PROCEDURES


- To specify Right or Left Hand Opening door
- To advise frame size & quantity
- To provide full delivery address




## HKS Ceiling Suspension Systems

HKS Ceiling suspension System are specially designed to meet the most stringent requirements for nowadays complex buildings. HKS Ceiling suspension System is comply to JIS and ASTM standard, therefore our system is popularly use in mega building projects for Industrial, commercial, institutional and residential.


HKS Suspension Ceiling System are manufactured from high quality Hot-Dipped Galvanized Steel with JIS G-3302 Standard and capped with white coated steel sheet (PPGI).

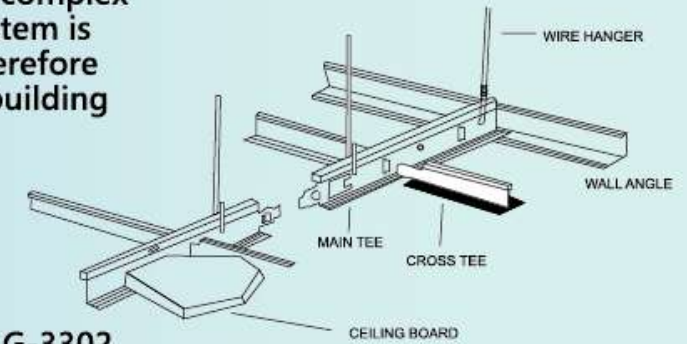


### MAIN TEE




### CROSS TEE



### WALL ANGLE



## LOAD VS DEFLECTION CURVES - Mid-Span Deflection (mm)

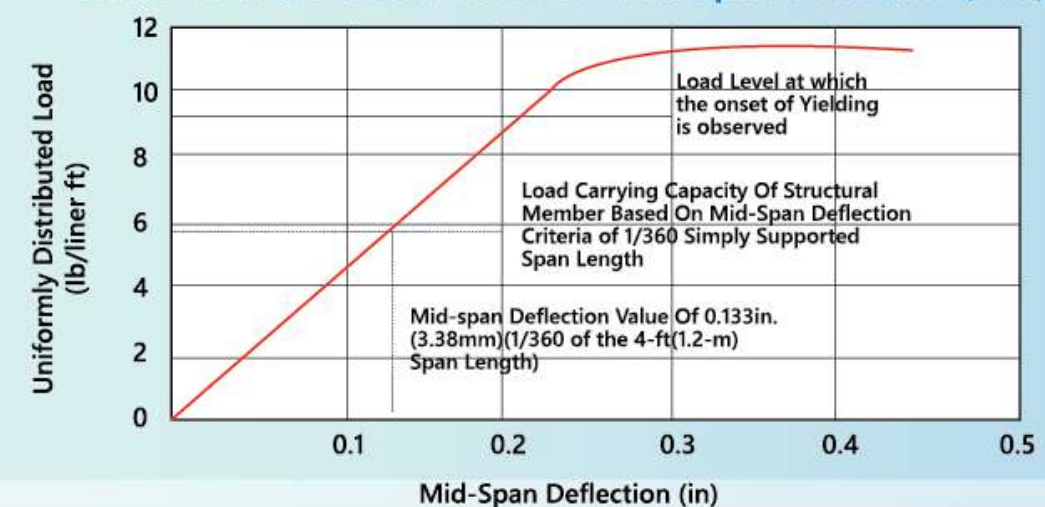





## PRODUCT SPECIFICATION & PACKING DETAIL




			LENGTH			
PRODUCT	THICKNESS	FINISHING	STANDARD	HEIGHT	WIDTH	PACKING / PACK
MAIN TEE 12'	GI : 0.30mm +/-0.03mm	White Coated	3660 mm	33 mm	25 mm	20pcs
Cross Tee 4'	GI : 0.30mm +/-0.03mm	White Coated	1220 mm	26 mm	25 mm	60pcs
Cross Tee 2'	GI : 0.30mm +/-0.03mm	White Coated	610 mm	26 mm	25 mm	60pcs
Wall Angle 10'	GTW : 0.35mm +/-0.03mm	White Coated	3048mm	22 mm	22 mm	50pcs

### PRODUCT FEATURES

1. Excellent & precised ceiling level
2. Durable & economical
3. Structural stability
4. Less wastage and mistake can be assured
5. Quality assurance & user friendly

(A) 600*600 Pattern Variety		600*600(B)
(A) 2ft*2ft		2ft*2ft(B)
(C) 4ft*2ft		4ft*2ft(D)
(C) 600*1200		600*1200(D)

Ceiling T-Assembly Illustration

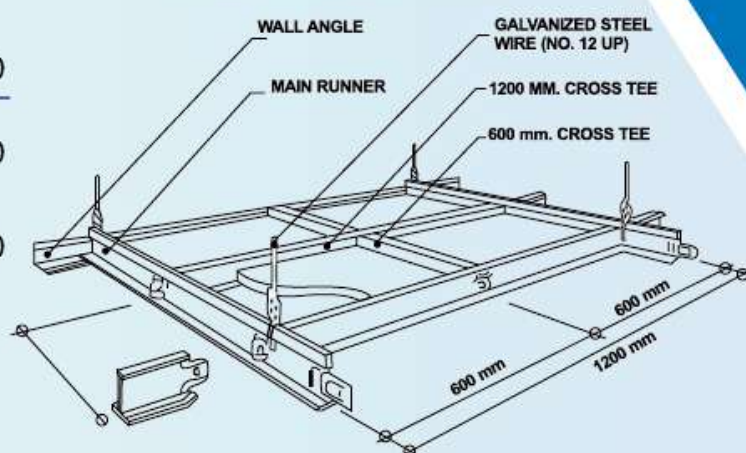

### ● INSTALLATION PROCEDURE

1. The HKS Ceiling Suspension System shall be install in accordance with recommendations of ASTM C635-97. The deflection of any component shall not exceed 1/360 of the span.
2. Using screw, stub nails or dry fasteners when installing the wall angle, Depending on what type of wall.
3. Main Tee should be suspending from the overhead structure with gauge 14 Galvanised steel wire together with hanger bracket and adjustable spring clip. The spacing of the main tee must be 48 inches or 24 inches from centre.
4. The Cross Tee should be inserted into the slots of main tee and locked into position by using slight forward pressure.



## Project Reference





# HKS<sup>®</sup> COIL & COIL SLITTING SERVICES

HAI KANG STEEL is committed to excel as a highly efficient and profitable organization with well-established and effective networking, preferred for its competitive advantage and recognized in the industry for its management excellence and resourcefulness, with capabilities and competencies for value creation in downstream activities.

## SLITTING SERVICES FROM STEEL COILS TO STEEL STRIPS

SPECIFICATIONS	
MATERIAL	Aluzinc Steel Coil
THICKNESS	0.25mm ~ 0.30mm
WIDTH	25mm ~ 1000mm
COIL WEIGHT	1 ~ 6 tons
Description	<p><b>Aluzinc Steel Coil</b></p> <p>Aluzinc Steel Coil is mild steel with a coating of aluminium with zinc. The Aluzinc protects the steel by providing cathodic protection to the exposed steel, so should the surface be damaged the aluminium with zinc will corrode in preference to the steel. Aluzinc steel is one of the most widely used products, used extensively in the building sector, automotive, agricultural and areas where the steel needs to be protected from corrosion.</p>
MATERIAL	Electro Galvanized Steel Coil
THICKNESS	0.50mm ~ 2.0mm
WIDTH	25mm ~ 1650mm
COIL WEIGHT	1 ~ 10 tons
Description	<p><b>Electro Galvanized Steel Coil</b></p> <p>Electro galvanized is zinc coated by electro-deposition for a light or thin coated mass. This product is manufactured for use as formed or miscellaneous parts where corrosion resistance is necessary as opposed to an uncoated sheet.</p>

## COIL SLITTING SERVICES

Material	Cold Rolled Steel Coils Electro Galvanized Steel Coil Stainless Steel Coils Aluminised Steel Coil Aluzinc Steel Coil
Thickness	0.25mm ~ 2.00mm
Coil Width	450mm ~ 1650mm
Strip Size	25mm ~ 1650mm

# HKS<sup>®</sup> COIL SLITTING SERVICES

## ALUZINC STEEL COIL



## ELECTRO GALVANIZED STEEL COIL



## SLITTING TO CUSTOMER REQUIREMENTS

